

SPECIFICATIONS

HW210

Tier 4 Final Engine

Net Power

SAE J1349 / 174 HP
(129.4 kW) at 2,000 rpm

Bucket Range

0.80 m³ - 1.34 m³
1.05 yd³ - 1.75 yd³

Operating Weight

21,200 kg (46,740 lb)

Standard Bucket

0.80 m³ - 1.05 yd³

ENGINE		
Maker / Model	Cummins QSB6.7	
Type	4-cycle turbocharged, charger air cooled diesel engine	
Rated flywheel horse power	SAE J1995 (gross)	183 HP (136.8kW) at 2,000 rpm
	SAE J1349 (net)	174 HP (129.4kW) at 2,000 rpm
	DIN 6271/1 (gross)	186 PS (136.8kW) at 2,000 rpm
	DIN 6271/1 (net)	176 PS (129.4kW) at 2,000 rpm
Max. torque	85.7 kg fm (620 lbf ft) / 1,500 rpm	
Bore x stroke	107 x 124 mm (4.2" x 4.9")	
Piston displacement	6700 cc (409 in ³)	
Batteries	2 x 12 V x 100 Ah	
Starting motor	Denso 24 V - 4.8 kW	
Alternator	Denso 24 V - 95 Amp	

HYDRAULIC SYSTEM

MAIN PUMP	
Type	Variable displacement tandem axis piston pumps
Max. flow	2 x 234 ℓ/min (61.8 gpm)
Sub-pump for pilot circuit (Gear Pump)	25.5 ℓ/min (6.7 gpm)

CROSS-SENSING AND FUEL-SAVING PUMP SYSTEM

HYDRAULIC MOTORS	
Travel	Two speed axial pistons motor with brake valve and parking brake
Swing	Axial piston motor with automatic brake

RELIEF VALVE SETTING	
Implement circuits	400 kgf/cm ² (5,690 psi)
Travel	380 kgf/cm ² (5,400 psi)
Power boost (boom, arm, bucket)	380 kgf/cm ² (5,400 psi)
Swing circuit	265 kgf/cm ² (3,770 psi)
Pilot circuit	40 kgf/cm ² (570 psi)
Service valve	Installed

HYDRAULIC CYLINDERS	
No. of cylinder bore X stroke	Boom: 120x1,290 mm
	Arm: 140x1,510 mm
	Bucket: 120x1,055 mm
	Dozer Blade: 125x222 mm
	Outrigger: 130x427 mm
	2Pcs Boom

DRIVES & BRAKES	
Drive method	Fully hydrostatic type
Drive motor	Axial piston motor, in-shoe design
Reduction system	Planetary reduction gear
Max. drawbar pull	11,600 kgf (25,570 lbf)
Max. travel speed (high / low)	35 km/h (21.7 mph) / 9.1 km/h (5.65 mph)
Gradeability	33° (65%)
Parking brake	Multi wet disc

CONTROL	
Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation.	
Pilot control	Two joysticks with one safety lever (LH): Swing and arm, Boom and bucket
Traveling and steering	Two levers with pedals
Engine throttle	Electric, Dial type



OPERATING WEIGHT (APPROXIMATE)

Operating weight, including 5,650 mm (18' 6") boom, 2,920 mm (9' 7") arm, SAE heaped 0.80 m³ (1.05 yd³) backhoe bucket, lubricant, coolant, full fuel tank, hydraulic tank and the standard equipment.

OPERATING WEIGHT	
Front outrigger and rear blade	21,200 kg (46,740 lb)
Front and rear outrigger	21,300 kg (46,960 lb)
Front blade and rear outrigger	21,300 kg (46,960 lb)

SWING SYSTEM

Swing motor	Fixed displacement axial piston motor
Swing reduction	Planetary gear reduction
Swing bearing lubrication	Grease-bathed
Swing brake	Multi wet disc
Swing speed	9.7 rpm

SERVICE REFILL CAPACITIES

	liter	US gal
Re-filling		
Fuel tank	310.0	81.9
Engine coolant	40	10.6
Engine oil	23.7	6.3
Swing device	6.2	1.6
Axle	Front	14.6
	Rear	18.5
Hydraulic system (including tank)	340.0	89.8
Hydraulic tank	165.0	43.6
DEF/AdBlue®	27	7.1

UNDERCARRIAGE

Reinforced box-section frame is all-welded, low-stress. Dozer blade and outriggers are available. A pin-on design.

Dozer blade	A very useful addition for leveling and back filling or clean-up work.
Outrigger	Indicated for max. operation stability when digging and lifting. Can be mounted on the front/or the rear.


SPECIFICATIONS HW210

Tier 4 Final Engine

HW210 DIMENSIONS

Unit: mm (ft-in)

5.65 m (18' 6") Mono boom, 2.92 m (9' 7") Arm,
Front outrigger and rear dozer blade

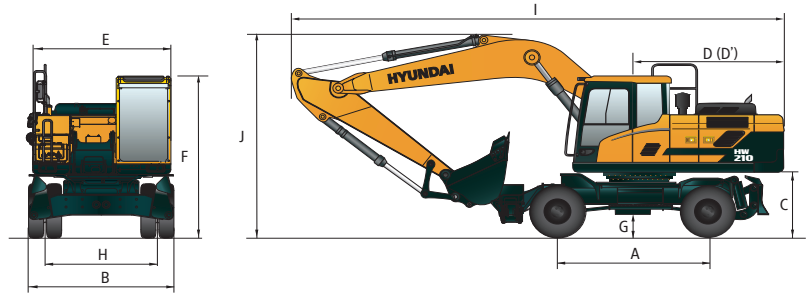


A	Wheel base	2,800	(9' 2")
B	Overall width	2,530	(8' 4")
C	Ground clearance of counterweight	1,300	(4' 3")
D	Rear-end distance	2,770	(9' 1")
D'	Rear-end swing radius	2,850	(9' 4")
E	Upperstructure width	2,530	(8' 4")
F	Overall height of cab	3,245	(10' 8")
G	Min. ground clearance	353	(1' 2")
H	Tread	1,914	(6' 3")

	Boom length	5,650	(18' 6")	
	Arm length	2,000 (6' 7")	2,400 (7' 10")	2,920 (9' 7")
I	Overall length (Traveling position)	9,590 (31' 8")	9,540 (31' 5")	9,380 (30' 9")
I'	Overall length (Shipping position)	9,680 (31' 9")	9,570 (31' 5")	9,500 (31' 2")
J	Overall height of boom (Traveling position)	3,720 (12' 2")	3,650 (11' 12")	4,020 (13' 2")
J'	Overall height of boom (Shipping position)	3,350 (10' 12")	3,240 (10' 8")	3,150 (10' 4")

HW210 WORKING RANGE

Unit : mm (ft-in)

	Boom length	5,680	(18' 8")	
	Arm length	2,000 (6' 7")	2,400 (7' 10")	2,920 (9' 7")
A	Max. digging reach	9,110 (29' 11")	9,480 (31' 1")	9,960 (32' 8")
A'	Max. digging reach on ground	8,870 (29' 1")	9,260 (30' 5")	9,750 (32' 0")
B	Max. digging depth	5,480 (18' 0")	5,880 (19' 3")	6,380 (20' 11")
B'	Max. digging depth (8' level)	5,240 (17' 2")	5,670 (18' 7")	6,210 (20' 4")
C	Max. vertical wall digging depth	4,970 (16' 4")	5,470 (17' 11")	5,810 (19' 1")
D	Max. digging height	9,500 (31' 2")	9,730 (31' 11")	10,000 (32' 10")
E	Max. dumping height	6,670 (21' 11")	6,900 (22' 8")	7,160 (23' 6")
F	Min. swing radius	3,700 (12' 2")	3,620 (11' 11")	3,580 (11' 9")

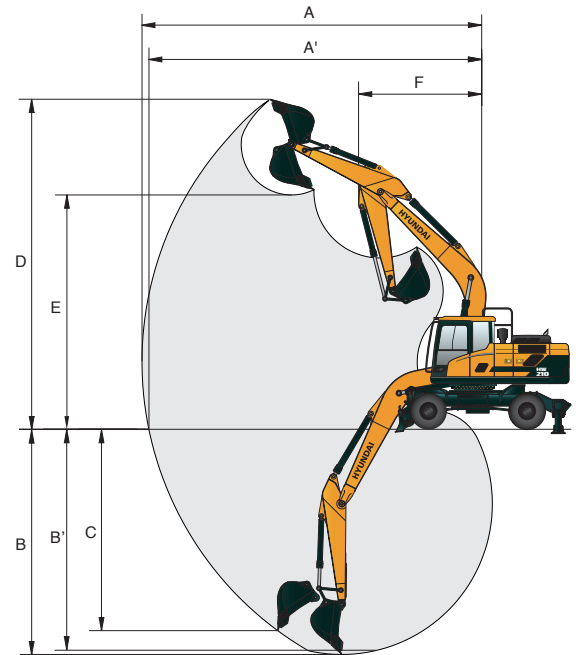

DIGGING FORCE

Arm	Length	mm (ft.in)	2,000 (6' 7")			2,400 (7' 10")			2,920 (9' 7")		
			Weight			Weight			Weight		
Bucket digging force	SAE	kN	975 (2,150)			1,045 (2,300)			1,095 (2,410)		
		kgf	133.4 [144.8]			133.4 [144.8]			133.4 [144.8]		
		lbf	13,600 [14,770]			13,600 [14,770]			13,600 [14,770]		
	ISO	kN	29,980 [32,550]			29,980 [32,550]			29,980 [32,550]		
		kgf	152.0 [165.0]			152.0 [165.0]			152.0 [165.0]		
		lbf	15,500 [16,830]			15,500 [16,830]			15,500 [16,830]		
Arm crowd force	SAE	kN	34,170 [37,100]			34,170 [37,100]			34,170 [37,100]		
		kgf	144.2 [156.5]			119.6 [129.9]			102.0 [110.7]		
		lbf	14,700 [15,960]			12,200 [13,250]			10,400 [11,290]		
	ISO	kN	32,410 [35,190]			26,900 [29,210]			22,930 [24,900]		
		kgf	151.0 [164.0]			125.5 [136.3]			106.9 [116.1]		
		lbf	15,400 [16,720]			12,800 [13,900]			10,900 [11,830]		
			33,950 [36,860]			28,220 [30,640]			24,030 [26,090]		


[Power Boost]

Note : Arm weight includes bucket cylinder, linkage, and pin

SPECIFICATIONS HW210


Tier 4 Final Engine

BUCKETS




SAE heaped
m³ (yd³)

0.80 (1.05)
0.87 (1.14)
0.92 (1.20)




1.10 (1.44)
1.20 (1.57)



1.34 (1.75)



0.90 (1.18)
1.05 (1.37)



0.87 (1.14)

Capacity m ³ (yd ³)		Width mm (in)		Weight kg (lb)	Recommendation mm (ft.in)					
					5,650 (18' 6") Mono Boom			5,390 (18' 6") 2-Piece Boom		
SAE heaped	CECE heaped	Without side cutters	With side cutters		2,000 (6' 7") Arm	2,400 (7' 10") Arm	2,920 (9' 7") Arm	2,000 (6' 7") Arm	2,400 (7' 10") Arm	2,920 (9' 7") Arm
0.80 (1.05)	0.70 (0.92)	1,070(42.1)	1,160(45.7)	770(1,700)	●	●	●	●	●	●
0.87 (1.14)	0.76 (0.99)	1,140(44.9)	1,230(48.4)	800(1,760)	●	●	●	●	●	■
0.92 (1.20)	0.80 (1.05)	1,190(46.9)	1,280(50.4)	820(1,810)	●	●	■	●	●	■
1.10 (1.44)	0.96 (1.26)	1,375(54.1)	1,465(57.7)	890(1,960)	●	■	▲	■	■	▲
1.20 (1.57)	1.05 (1.37)	1,390(54.7)	1,480(58.3)	920(2,030)	●	■	-	■	▲	-
1.34 (1.75)	1.17 (1.53)	1,525(60.0)	1,615(63.6)	990(2,180)	■	▲	-	▲	-	-
■ 0.90 (1.18)	0.79 (1.03)	1,210(47.6)	-	880(1,940)	●	●	■	●	●	■
■ 1.05 (1.37)	0.92 (1.20)	1,355(53.3)	-	940(2,070)	●	■	▲	■	■	▲
■ 0.87 (1.14)	0.77 (1.01)	1,195(47.0)	-	940(2,070)	●	●	■	●	●	■

- Heavy duty bucket
- Rock-Heavy duty bucket

- : Applicable for materials with density of 2,000 kgf/m³ (3,370 lbf/yd³) or less
- : Applicable for materials with density of 1,600 kgf/m³ (2,700 lbf/yd³) or less
- ▲ : Applicable for materials with density of 1,100 kgf/m³ (1,850 lbf/yd³) or less

Lifting Capacity Chart

Boom: 5,650 mm (18' 6")
Arm: 2,920 mm (9' 7")
Bucket: 0.80 m³ (1.05 yd³) SAE heaped
CWT 4,100 kg (9,039 lb)

Capacities based on North American Standard Configuration in accordance with ISO condition 2 standard.
Rating over front
Rating over side or 360 degree

Lift-point height m (ft)		Lift-point radius										At max. reach		
		1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (25 ft)		Capacity		Reach
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	m (ft)
7.5 m (29.5 ft)	kg lb							*4,460 *9,830	*4,460 *9,830			*3,120 *6,880	*3,120 *6,880	6.46 (21.2)
6.0 m (20 ft)	kg lb							*4,480 *9,880	*4,480 *9,880			*2,890 *6,370	*2,890 *6,370	7.50 (24.6)
4.5 m (15 ft)	kg lb					*5,800 *12,790	*5,800 *12,790	*5,060 *11,160	*5,060 *11,160	*4,750 *10,470	*4,750 *10,470	*2,840 *6,260	*2,840 *6,260	8.13 (26.7)
3.0 m (10 ft)	kg lb					*7,660 *16,890	*7,660 *16,890	*5,920 *13,050	*5,920 *13,050	*5,140 *11,330	4,750 10,470	*2,900 *6,390	*2,900 *6,390	8.44 (27.7)
1.5 m (5 ft)	kg lb					*9,340 *20,590	*9,340 *20,590	*6,790 *14,970	6,440 14,200	*5,590 *12,320	4,620 10,190	*3,080 *6,790	*3,080 *6,790	8.48 (27.8)
Ground Line	kg lb			*6,870 *15,150	*6,870 *15,150	*10,240 *22,580	9,770 21,540	*7,410 *16,340	6,260 13,800	*5,910 *13,030	4,530 9,990	*3,430 *7,560	*3,430 *7,560	8.25 (27.1)
-1.5 m (-5 ft)	kg lb	*7,420 *16,360	*7,420 *16,360	*11,520 *25,400	*11,520 *25,400	*10,360 *22,840	9,710 21,410	*7,600 *16,760	6,200 13,670	*5,900 *13,010	4,520 9,960	*4,050 *8,930	*4,050 *8,930	7.71 (25.3)
-3.0 m (-10 ft)	kg lb	*12,140 *26,760	*12,140 *26,760	*14,010 *30,890	*14,010 *30,890	*9,720 *21,430	*9,720 *21,430	*7,150 *15,760	6,260 13,800			*5,340 *11,770	5,260 11,600	6.80 (22.3)
-4.5 m (-14.8 ft)	kg lb			*11,130 *24,540	*11,130 *24,540	*7,790 *17,170	*7,790 *17,170					*6,160 *13,580	*6,160 *13,580	5.33 (17.5)

NOTES:

- Lifting capacities are based on ISO 10567.
- Lifting capacities for the HX series do not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
- The lift-point is the bucket pivot mounting pin on the arm (without bucket mass).
- (*) indicates load limited by hydraulic capacity.

SPECIFICATIONS HW210

Tier 4 Final Engine

ENGINE	STD	OPT
Cummins QSB 6.7 engine	•	
HYDRAULIC SYSTEM	STD	OPT
Intelligent Power Control (IPC)		
3-power mode, 2-work mode, user mode	•	
Variable Power Control	•	
Pump Flow Control	•	
Attachment Mode Flow Control	•	
Engine Auto Idle	•	
Engine Auto Shutdown Control		•
Electronic Fan Control	•	
CAB & INTERIOR	STD	OPT
ISO Standard cabin		
Rise-up type windshield wiper	•	
Radio / USB player	•	
Handsfree mobile phone system with USB	•	
12 volt power outlet (24V DC to 12V DC converter)	•	
Electric horn	•	
All-weather steel cab with 360°visibility	•	
Safety glass windows	•	
Sliding fold-in front window	•	
Sliding side window(LH)	•	
Lockable door	•	
Hot & cool box	•	
Storage compartment & Ashtray	•	
Transparent cabin roof-cover	•	
Sun visor	•	
Door and cab locks, one key	•	
Mechanical suspension seat with heater	•	
Pilot-operated slidable joystick	•	
Console box height adjust system	•	
Automatic climate control		
Air conditioner & heater	•	
Defroster	•	
Starting Aid (air grid heater) for cold weather	•	
Centralized monitoring		
8" LCD display	•	
Engine speed or Trip meter/Accel.	•	
Engine coolant temperature gauge	•	
Max power	•	
Low speed/High speed	•	
Auto idle	•	
Overload	•	
Check Engine	•	
Air cleaner clogging	•	
Indicators	•	
ECO Gauges	•	
Fuel level gauge	•	
Hyd. oil temperature gauge	•	
Fuel warmer	•	
Warnings	•	
Communication error	•	
Low battery	•	
Clock	•	
Cabin lights		•
Cabin front window rain guard		•
Cabin roof-steel cover		•

CAB & INTERIOR	STD	OPT
Seat		
Adjustable air suspension seat with heater		•
Cabin FOPS/FOG		
FOPS (Falling Object Protective Structures)ISO 3449 Level 2		•
FOG (Falling Object Guard)		•
Cabin ROPS		
ROPS (Roll Over Protective Structures)	•	
SAFETY	STD	OPT
Battery master switch	•	
Rearview camera		•
AAVM (Advanced Around View Monitoring)		•
Four front working lights (2 boom mounted, 2 front frame mounted)	•	
Travel alarm		•
Rear work lamp		•
Beacon lamp		•
Automatic swing brake	•	
Boom holding system	•	
Arm holding system	•	
Safety lock valve for boom cylinder with overload warning device		•
Safety lock valve for arm cylinder		•
Swing Lock System		•
Four outside rearview mirror	•	
OTHER	STD	OPT
Booms		
5.65 m, 18' 6" Mono	•	
5.39 m, 17' 8" 2-Piece		•
Arms		
2.0 m, 6' 7"		•
2.4 m, 7' 10"		•
2.92 m, 9' 7"	•	
Removable clean-out dust net for cooler	•	
Removable reservoir tank	•	
Fuel pre-filter	•	
Fuel warmer	single	•
	dual	•
Self-diagnostics system	•	
Hi-mate (Remote Management System)	Mobile	•
	Satellite	•
Batteries (2 x 12V x 100 AH)	•	
Fuel filler pump (50 L/min)		•
Single-acting piping kit (breaker, etc.)		•
Double-acting piping kit (clamshell, etc.)		•
Rotating Piping Kit		•
Quick coupler piping		•
Quick coupler		•
Accumulator for lowering work equipment	•	
Pattern change valve (2 patterns)		•
Fine Swing Control System		•
Tool kit		•
Auto cruiser system	•	
Travel pedal (2way)		•
UNDERCARRIAGE	STD	OPT
Front outrigger and rear blade	•	
Front and rear outrigger		•
Front blade and rear outrigger		•
Tires-dual (10.00-20-16PR tube)	•	
Tires-dual (10.00-20 solid)		•
Fenders (Mudguards)		•

* Standard and optional equipment may vary. Contact your Hyundai dealer for more information.
 The machine may vary according to International standards.
 * The photos may include attachments and optional equipment that are not available in your area.
 * Materials and specifications are subject to change without advance notice.
 * All imperial measurements rounded off to the nearest pound or inch.

PLEASE CONTACT



www.hceamericas.com

6100 Atlantic Blvd., Norcross, GA 30071

TEL (678) 823 7777 FAX (678) 823 7778